

# VeriSens<sup>®</sup> vision sensors

Image-based quality control – easy and intuitive.



Eyeing  
your  
quality.

# Simply focused on the essentials.

Baumer is a global leader in sensor solutions for factory and process automation. More than 2,700 employees in 39 subsidiaries in 19 countries are at your service across the globe.

Baumer ranks with its powerful vision sensors among the world's most successful suppliers in this product category. Our customers profit from a structured product portfolio with high functionality and innovative features.

Everything we do is governed by our mission to continuously improve our products and shape technological developments. At the same time we focus on high performance, outstanding quality and simple operation – giving you more time for solving your application needs.

Where standard products come to their limits, we develop market-oriented, customized components in close cooperation with our customers. The result: Your decisive competitive edge.



# The right vision sensor for your application.

Are you looking for a sensor where maximum functional and operational flexibility go together with easy process integration? *VeriSens*<sup>®</sup> vision sensors offer all these benefits – and still many more.

## What exactly is a *VeriSens*<sup>®</sup> vision sensor?

*VeriSens*<sup>®</sup> is a complete image processing system in the shape of a sensor. An image sensor, illumination (or illumination connection), optics (also interchangeable lenses), hardware / software, as well as Ethernet and digital interfaces, e.g. for PLC connection, are integrated in a compact, industry-suited housing. After typical one-time configuration on PC, a vision sensor is ready to perform a specific task like a conventional sensor.

*VeriSens*<sup>®</sup> vision sensors solve inspection tasks and can perform up to 32 feature checks simultaneously:

- Presence and completeness checks
- Determination or inspection of object position and orientation
- Reading and verifying human-readable imprints (OCR / OCV)
- Reading and checking matrix codes and barcodes including GS1 codes

## How does a *VeriSens*<sup>®</sup> vision sensor work?

*VeriSens*<sup>®</sup> acquires images, evaluates them and communicates the results to the system control or to individual components in your system. Initial configuration on PC allows you entry of image acquisition parameters, selecting tools for feature checks and setup of the required interfaces.

## Where does *VeriSens*<sup>®</sup> make the most sense?


*VeriSens*<sup>®</sup> vision sensors tap their full potential of efficiency wherever various features must be checked in parallel or part locations vary, tasks which usually are only mastered by sophisticated sensor technology. This also includes applications where a visual inspection is advisable and/or contactless checks are required.

An intelligent sensor like *VeriSens*<sup>®</sup> is also the optimum component for checking (even different) batches in the line or communicating collected data.

*VeriSens*<sup>®</sup> vision sensors operate extremely efficient – depending on the scope of feature checking, more than 8,000 inspections per minute can be performed.

## *VeriSens*<sup>®</sup> vision sensors at a glance

- Wide variety of feature checks with one single sensor
- Easy configuration within a few minutes
- Compact, industry-suited metal housing with protection class IP 67 or IP 69K
- Intuitive and unified configuration software
- Versatile connection options via digital I/O and Industrial Ethernet



# VeriSens<sup>®</sup> – tried and tested in many industries.

We have earned a reputation supplying the automotive, food and beverage as well as packaging industry where we have acquired many years of expertise. We are also close to the medical and pharmaceutical sector by supplying sensor technology to perform inspection tasks and to provide vital findings.

Every industry has its particular needs. We would like to give you a brief overview of how and where our detection and inspection technology is applied.




## Food and beverage industry

- Checking best-before dates
- Presence and position of straws on primary packaging
- Position of safety closures
- and many more

### Example:

Inspection of best-before dates

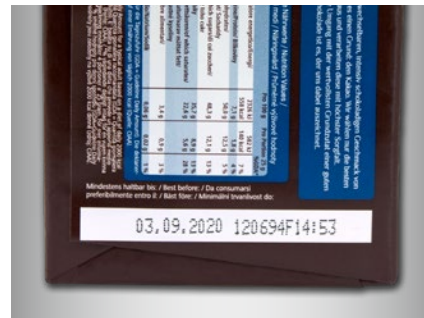

OK



NOK





## Packaging industry


- Cap monitoring
- Foil wrapping seams
- Label inspection (logo, text, code, product content, etc.)
- and many more

### Example:

Inspection of forward cap alignment

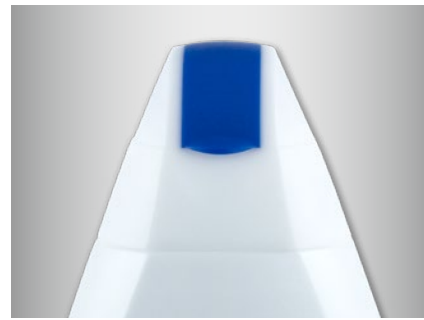

OK



NOK





## Automotive industry/electronics


- Assembly and surface mounting monitoring
- Presence and alignment check of pins
- Detection of overmolding, injection molding errors, scratches, etc.
- and many more

### Example:

Inspection of fuse type (color) position

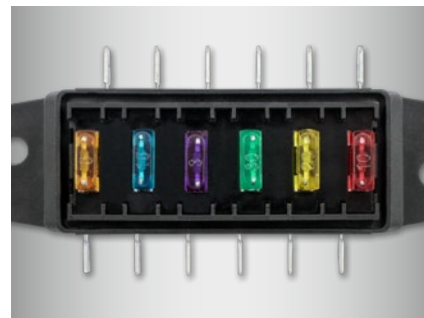

OK




NOK



## Assembly/handling

- Position detection for pick-and-place
- Presence check and position monitoring of components
- Position of protective caps or plugs
- and many more

Example: Position detection of blanked parts for pick-and-place

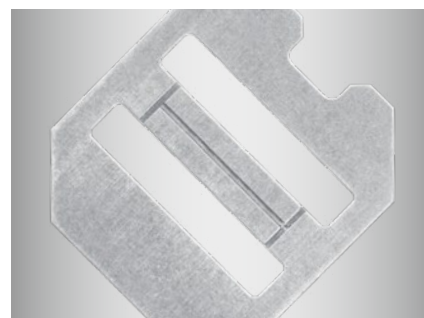

OK



NOK

# Inspired by nature.

## Flexibility

We recognize objects in their entirety and this way can easily determine their position.

## Object recognition

We can identify objects even in weak light – namely, by their contour.

## Clearly focused

We can focus on specific details.



## Robust

Our sensitive eye lens is protected by the flexible eyelid.

## Communicative

Our eyes are linked to the high-speed network of our nervous system.

## A clever mind on top

The eye requires intelligence.

## Light conditions

Using artificial illuminations we can see even in weak light.

# Our technology as evolution.

## Flexibility

No matter how something is positioned on the conveyor belt – the integrated 360° *FEXLoc*® part recognition always keeps *VeriSens*® feature checks on track.

## Object recognition

*VeriSens*® features a contour-based mode of operation – in real time calculated by the patented Baumer *FEX*® image processor.

## Clearly focused

*VeriSens*® offers free choice of lenses to ensure optimum object focusing.



## Robust

Every *VeriSens*® provides at least IP 67 protection. Industry-suited metal housing and modular tube system protect the entire vision sensor, even including the interchangeable lens.

## Clever technology combined

*VeriSens*® is a perfectly harmonized system to see, decide, communicate – and even to learn new things.

## Communicative

*VeriSens*® provides results over Ethernet, Industrial Ethernet or digital I/Os and even controls Universal Robots (UR).

## Light conditions

*VeriSens*® features integrated machine vision illumination. Besides powering external illumination, the models of the XC series are the only vision sensors with fully integrated flash controller to multiply brightness.


***VeriSens*® – even faster and more objective than nature.**

Do you want to benefit from the flexibility and versatility of image-based product verification as well? As a compact image processing system in the shape of a sensor, *VeriSens*® is an ideal component which comes with all the necessary hardware and software and is also intuitively configurable using a PC.

# What makes *VeriSens*<sup>®</sup> so special for our customers?

## ■ Patented Baumer *FEX*<sup>®</sup> image processor – inspired by nature


Any process deviations, such as varying light intensity, demanding object surfaces or ambient background influence quality in image processing. *VeriSens*<sup>®</sup> acts like human beings who can still recognize trees and houses clearly by their contours even in dismal weather: The patented *FEX*<sup>®</sup> image processor calculates contours in real time where others discern only shades of gray. Contour-based image processing works reliably and quickly – even in less stable ambient light conditions.

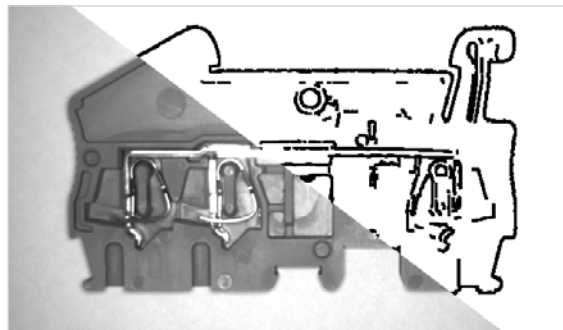

Visualization of the detected object by conventional image processing (bottom) and contour-based technology using Baumer *FEX*<sup>®</sup> image processor (top)

## ■ *FEXLoc*<sup>®</sup> part location – to simplify the machine design

The location of parts during feeding does not matter to *VeriSens*<sup>®</sup>. Reliable 360° part recognition enables virtual object alignment to check the correct positions. This means that mechanical part alignment is no longer necessary. All XF, XC, and CS series models are equipped with integrated *FEXLoc*<sup>®</sup> part location.

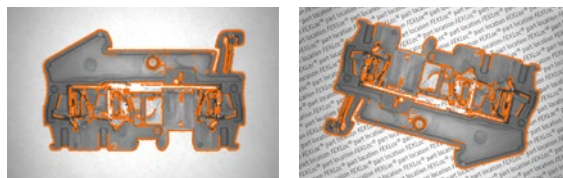


Virtual object alignment using *FEXLoc*<sup>®</sup>  
left: object contours  
right: object turned in front of severe background structures



## See the right colors even faster – with *ColorFEX*<sup>®</sup> in 3D

*ColorFEX*<sup>®</sup> is the unique, intelligent 3D color assistant for quick and intuitive setup of colors and their differentiation. Object colors and their shades are automatically identified and visualized in 3D. This allows for very easy and self-explaining setup of reliable color inspections.



TUTORIAL

# Easy to use.





- **SmartGrid** – the intelligent calibration target

*SmartGrid* (patent-pending) provides four benefits: Supporting automated teach-in for image distortion correction in real time, it allows for precise object and dimensional checks even when *VeriSens*® is installed in inclined position. When converting to world coordinates, *VeriSens*® is receiving scaling specifications via *SmartGrid* (optionally with Z calibration). *SmartGrid* is the basis for automated coordinate alignment by *VeriSens*® when attached to Universal Robots (UR) to determine object positions.

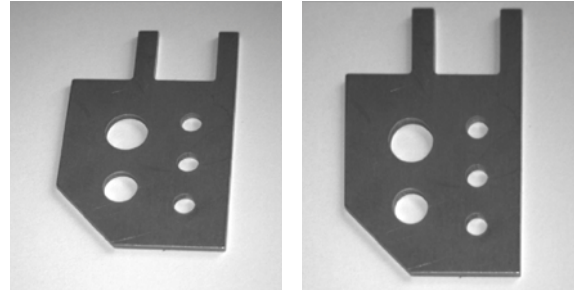


Image distortion correction (right: corrected)


- **Universal Robots (UR) control** – easier than ever before

*VeriSens*® controls Universal Robots (UR) after just a few minutes of setup. Automated coordinate alignment via *SmartGrid* replaces the conventional manual “hand-eye” procedure. *VeriSens*® *URCap* is the user-friendly UR “app” and allows for easy vision sensor installation and integration into the program flow. UR programming utilizes only two additional nodes (commands) for image processing and thus remains as easy as ever: from tracking several objects including free space checks to identifying free storage space on to quality inspections and object identification – there are virtually no limits for applications.




- **Industry-suited design with IP 67 resp. IP 69K protection**

*VeriSens*® vision sensors come in robust aluminium respectively stainless steel housing that is up to harsh industrial environments. The patented modular tube system for the models with C-mount interface provides optimum protection for interchangeable lenses. Variable intermediate rings allow fast and economical adaptation to longer lenses – retrospectively as well.

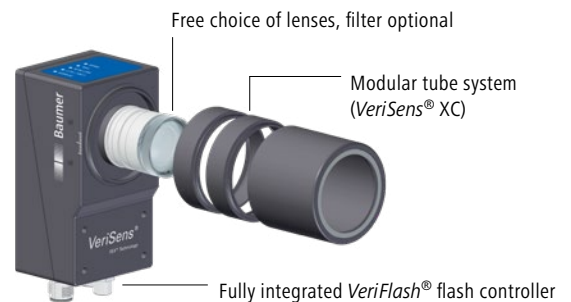

Easy  
to configure.

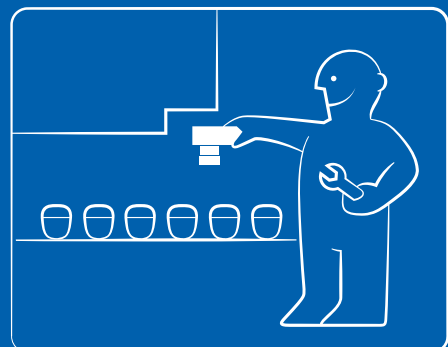

# Unified configuration software and integrated web interface.

Thanks to *VeriSens® Application Suite*, the cross-series unified configuration software available in 9 languages, your vision sensor is configured in just four easy-to-understand steps. Even for beginners the first job configuration will take only a few minutes, saving valuable time on the project.

Software includes simulators for every device – any conventional digital camera or smartphone as image source will do.

The simulators allow you to test feature checks offline prior to product purchase. An installation is not required – no need for administrator privileges.

A configurable human-machine interface is already integrated within the device for customers who want to configure *VeriSens®* also during the production process.

The *VeriSens® Application Suite* needs only a few clicks to set web interface options (functionalities, user groups, design) and therefore will be operational in just a few minutes. Security is provided by the encrypted HTTPS connection (device dependent). The *MultiViewer* feature enables selection of up to 16 *VeriSens®* vision sensors for view a standard web browser – therefore you will always be able to keep an eye on the entire production line.



Download and test free of charge  
*VeriSens® Application Suite*  
[www.baumer.com/vs-sw](http://www.baumer.com/vs-sw)



## *VeriSens®* software at a glance

### *VeriSens® Application Suite* for configuration and offline simulation

- Intuitive to use, even for non-expert users
- 4 steps to solve your inspection task
- Optionally with pop-up context help



TUTORIAL


### *VeriSens®* web interface for visualization and monitoring in operation


- Visualization using the existing web browser, no plug-ins required
- Functionalities and design configured within few minutes
- Optimized for touch screen operation, optional user levels




TUTORIAL

# Absolutely powerful.

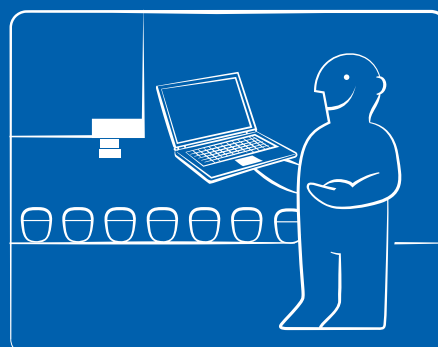


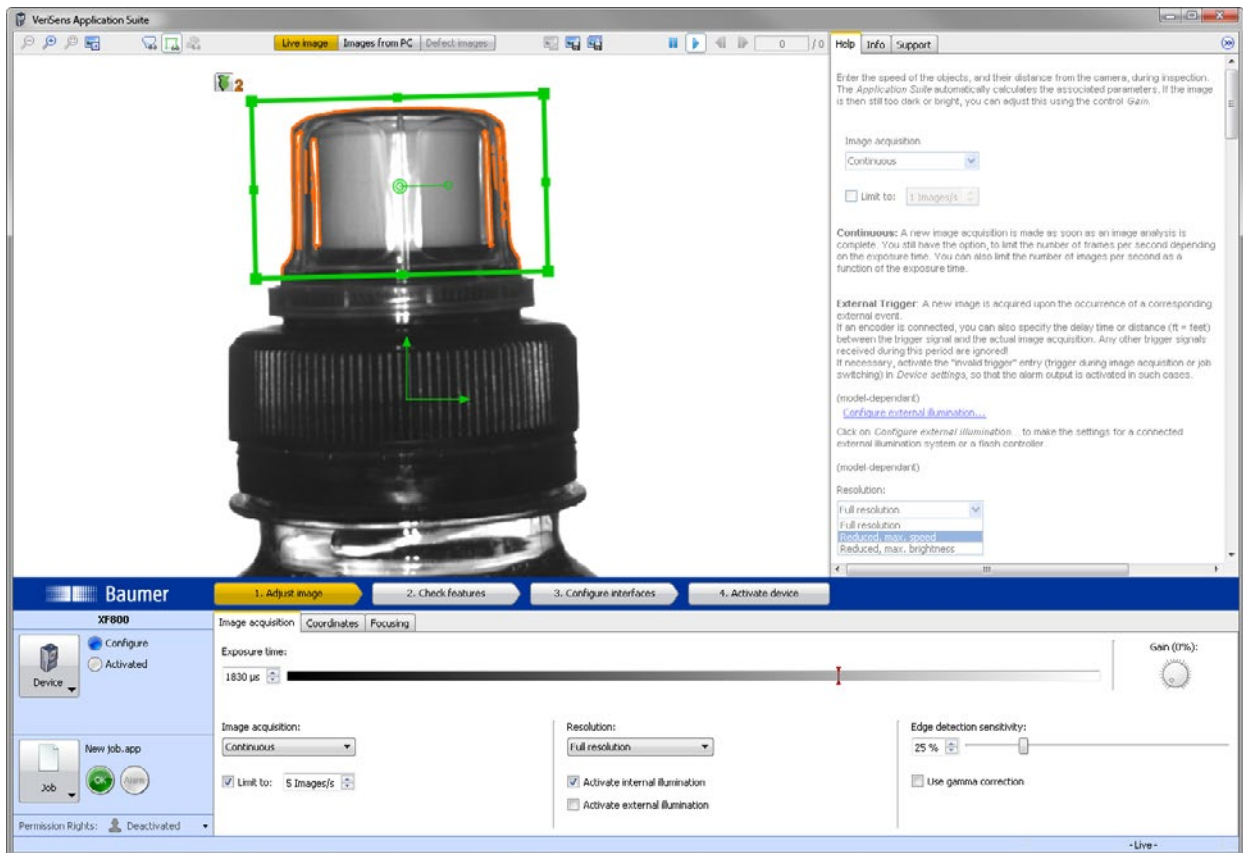

VeriSens® Application Suite

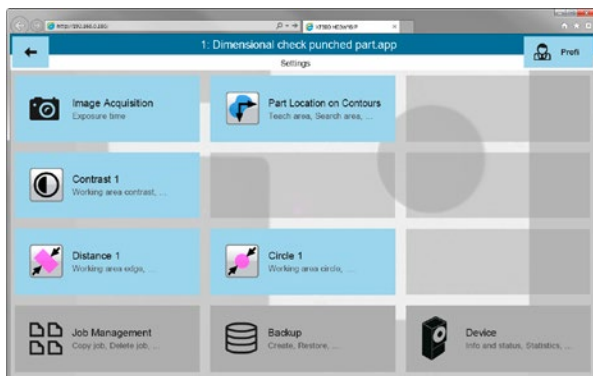


VeriSens® web interface

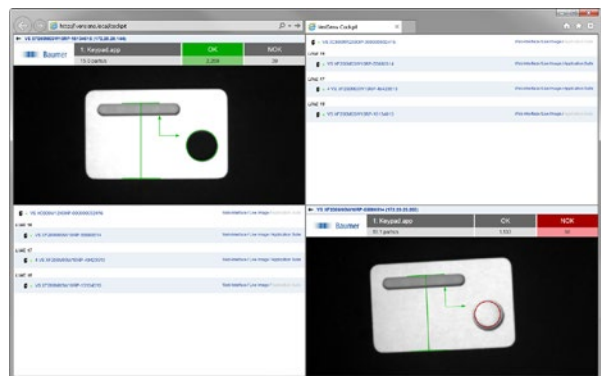

VeriSens® MultiViewer

Absolutely ingenious.

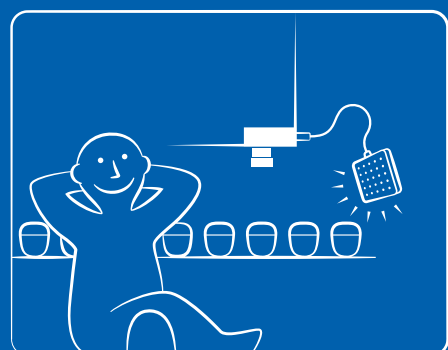



## XF series: All aboard!

XF stands for “eXtended Functionality” – the series includes everything required to immediately enter the world of image processing. The versatile scope of functionalities ensures maximum flexibility of up to 22 feature checks and makes sure the right image tool is always available. A single sensor will suffice for simultaneously checking object properties and positions as well as reading text (OCR/OCV) and 1D/2D codes. All XF series models feature robust 360° part location by *FEXLoc*® for reliable part recognition.

The XF models integrate LED illumination in white or infrared. Infrared with integrated daylight filter provides several application benefits such as highlighting particular object features and minimizing ambient light effects. Furthermore, nobody working nearby will be bothered by flashing *VeriSens*® illumination.

### XF series

- Image evaluation: monochrome or color
- Includes all *VeriSens*® feature checks (up to 22)
- Integrated optics: 8 | 10 | 12 | 16 mm
- Integrated illumination, white or infrared
- Housing: aluminum (IP 67) or stainless steel (IP 69K)

- **Models XF700 /XF800 /XF900**  
Latest hardware generation to boost productivity, with enhanced identification algorithms (XF800 /XF900), integrated real-time distortion correction and Industrial Ethernet (PROFINET and EtherNet/IP™)
- **Models XF700C /XF800C (color)**  
Latest hardware generation with *ColorFEX*® color assistant for convenient and reliable color setup and integrated Industrial Ethernet (PROFINET and EtherNet/IP™)
- **Models XF800 /XF900**  
Identification functions additionally: 1D / 2D code identification, reading of plain text (OCR) without requiring previous font training, print quality evaluation (OCV)
- **Models XF900**  
The robot expert that integrates into the program flow of Universal Robots (UR) with the help of *VeriSens*® *URCap* – for image-based object tracking and robot-supported quality control, optional Z calibration for coordinate scaling in space





## XC series: Maximum flexibility.

XC is an abbreviation of “eXtended Functionality with C-mount” – the series for maximum functionality and versatility. Advanced users benefit from up to 22 feature checks and the freedom to choose lens and illumination.

External illumination is supplied by the integrated *VeriFlash*<sup>®</sup> flash controller powering at the required pulse up to 48V and 4A. *ColorFEX*<sup>®</sup>, the intelligent and multiple award-winning 3D color assistant, enables intuitive and quick color setup in 3D. The patented and modular *VeriSens*<sup>®</sup> XC Tube System is the optimum protection for interchangeable lenses and can be configured to match the individual size of the lens.

### ■ Models XC700 / XC800 / XC900

Latest hardware generation to boost productivity, with enhanced identification algorithms (XC800 / XC900), integrated real-time distortion correction and Industrial Ethernet (PROFINET and EtherNet/IP™), XC800 / XC900 with additional identification functions: 1D / 2D code identification, reading of plain text (OCR) without requiring previous font training, printing quality evaluation (OCV), XC900: The robot expert that integrates into the program sequence of Universal Robots (UR) with the help of *VeriSens*<sup>®</sup> *URCap* – for image-based object tracking and robot-supported quality control, optional Z calibration for coordinate scaling in space

### ■ Models XC700C / XC800C (color)

Latest hardware generation with *ColorFEX*<sup>®</sup> 3D color assistant for convenient and reliable color setup, XC800C with additional identification functions

## XC series

- Image evaluation: monochrome or color
- Includes all *VeriSens*<sup>®</sup> feature checks (up to 22)
- C-mount and free choice of lenses
- *VeriFlash*<sup>®</sup> flash controller
- Industry-suited aluminum housing (IP 67)





## CS/ID series: The experts.

The *VeriSens*<sup>®</sup> sensor functionalities of the CS and ID series focus on core application tasks making them the ideal entry-level product for image-based object inspection.

The CS series (“*Check & Sort*”) provides every tool required for checking and sorting applications:

- **Model CS100**

Either with white or infrared illumination – particularly easy-to-use vision sensors designed for product inspection with immediate results output via digital I/Os

The ID series (“*IDentification*”) features both reliable text readers and code readers:

- **Model ID510 (text and code reader)**

Latest hardware generation to double productivity, integrated Industrial Ethernet (PROFINET and EtherNet/IP<sup>™</sup>), enhanced identification algorithms, in addition: reading of plain text (OCR) without requiring previous font training, print quality evaluation (OCV)

- **Model ID100 (code reader)**

Reads barcodes and matrix codes (1D/2D codes including GS1) with quality evaluation

### CS/ID series














- Image evaluation: monochrome
- Selected *VeriSens*<sup>®</sup> feature checks (up to 6)
- Integrated optics, 10 mm, 12 mm or 16 mm
- Integrated illumination, white or infrared
- Housing: aluminum (IP 67)



# VeriSens<sup>®</sup> vision sensors product overview

Additional devices (including IP 69K):  
www.baumer.com/verisens

Type key (e.g.): VS XF 800 M 03 W 12 I P		Series (XF/XC/CS/ID)	Model with protection class	Resolution [µm]	LED illumination	Interface	Output (PNP/NPN)
XF	800	M	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)

Article No.	Type name	Series	Model with protection class	Resolution [µm]	LED illumination	Interface	Output (PNP/NPN)
	11700462 VS XF700M03W08IP	XF	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11173091 VS XF700M03W12IP						
	11173090 VS XF700M03W16IP						
	11700463 VS XF700M03I08IP						
	11173089 VS XF700M03I12IP						
	11173088 VS XF700M03I16IP						
	11210957 VS XF800M03W08IP						
	11162177 VS XF800M03W12IP						
	11162175 VS XF800M03W16IP						
	11700461 VS XF800M03I08IP						
	11173087 VS XF800M03I12IP						
	11173086 VS XF800M03I16IP						
	11700457 VS XF900M03W08IP						
	11700458 VS XF900M03W12IP						
	11700460 VS XF900M03I08IP						
	11700459 VS XF900M03I12IP						
	11197478 VS XF700C03W12IP	XF	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11197479 VS XF700C03W16IP						
	11210959 VS XF800C03W08IP						
	11199868 VS XF800C03W12IP						
	11199869 VS XF800C03W16IP						
	11173085 VS XC700M03X00IP	XC	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11173084 VS XC700M12X00IP						
	11173083 VS XC700M20X00IP						
	11166806 VS XC800M03X00IP						
	11166807 VS XC800M12X00IP						
	11166808 VS XC800M20X00IP						
	11700454 VS XC900M03X00IP						
	11700456 VS XC900M12X00IP						
	11700455 VS XC900M20X00IP						
	11181282 VS XC700C03X00IP	XC	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11181283 VS XC700C12X00IP						
	11166809 VS XC800C03X00IP						
	11180704 VS XC800C12X00IP						
	11048500 VS CS100M03W10EP	CS	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11076261 VS CS100M03W16EP						
	11089900 VS CS100M03I10EP						
	11093026 VS CS100M03I16EP						
	11048489 VS ID100M03W10RP	ID	IP 67 (100/200/510/700/800/900) IP 69K (105/205)	752/640 × 480 (VGA, 1/3" / 1/4") 1280 × 960 (1.2 MP, 1/3") 1600 × 1200 (2 MP, 1/1.8")	White (integrated) Infrared (integrated) VeriFlash <sup>®</sup> flash controller	8 mm (integrated) 10 mm (integrated) 12 mm (integrated) 16 mm (integrated) C-mount interface	Ethernet (TCP/UDP), Industrial Ethernet <sup>1)</sup> Ethernet (TCP/UDP) Ethernet (TCP/UDP), RS485 Output (PNP/NPN)
	11076263 VS ID100M03W16RP						
	11173082 VS ID510M03W12IP						
	11173081 VS ID510M03I12IP						

<sup>1)</sup> PROFINET/Ethernet/IP™

<sup>2)</sup> for configuration only

# Vision Guided Robotics easier than ever before – *VeriSens*<sup>®</sup> for Universal Robots (UR) control.

Robots with “eyes” offer enormous versatility in the application. Pick and place flexibility, gripper clearance checks, overlap inspection, quality control, object identification and more – image processing paves the way.



TUTORIAL

## Why is *VeriSens*<sup>®</sup> so unique for use with Universal Robots?


- **Really easy:** It takes only two commands in UR programming to access the many great benefits of image processing, such as object tracking. Thanks to their excellent usability, vision sensors and robots significantly cut down on operator training time.
- **No longer manual but automated:** Automated coordinate alignment via *SmartGrid* eliminates the conventional required elaborate manual “hand-eye” procedure.
- **Matching all:** Object tracking, quality control, identification, installed at robot or overhead – the universal concept will support you in virtually any application and allows for fast adaptations.



## *SmartGrid*

Innovative *SmartGrid* is the centerpiece for fast setup in few minutes:

- Teach-in for correction of image distortion in real time
- Conversion to world coordinates and orientation within the coordinate system
- Z-calibration for 3D scaling of coordinates
- Automated coordinate alignment between *VeriSens*<sup>®</sup> and Universal Robot

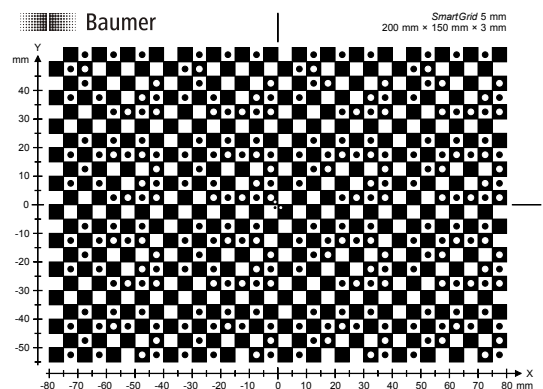

## Application versatility

- Control object pick and place
- Quality control
- Object identification













# A question of light.

A decisive criterion for inspection stability in the application is the accentuation of differences in application-relevant features. Therefore illumination should be selected with utmost care in order to obtain optimum results. Basically, there is incident light, dark field and back light.

Colored illumination may cause strong contrast. Due to the topic's complexity, the following provides only a rough outline. The Baumer team will gladly be of help should you need more detailed support.

## Illumination position


Illumination type	Ideal for	Object
<b>Incident light</b> Homogenous illumination of rough and matte objects	Presence and position checks, imprint inspection (OCR/OCV), e. g. best-before date	 
<b>Dome light</b> Shadow-free illumination, suppression of surface irregularities and reflections	Inspection of severely glossy or mirroring objects, e. g. yogurt lids (seals)	 
<b>Dark field light</b> Highlighting any unevenness, contours, edges and defects	Surface inspection, e. g. scratches or engravings	 
<b>Back light</b> Inspected object illumination from below or behind delivers high-contrast shadow images	Contour-based inspection, e. g. accuracy of punched parts and mounting holes, measuring operations, presence checks of transparent packaging	 

## Colored illumination


Colored illumination may intensify or suppress defined colors also in monochrome imaging. The contrast created this way helps recognizing relevant features which is decisive for an application-specific and optimally matching solution.

For example, blue light cast on a multi-color surface will be reflected by the blue content only. The more blue content is in object, the more light is reflected and the brighter will appear the object. In an analog way, red content illuminated in blue appears extremely dark.


Illumination: White




Red



Blue



Green



# Technical data


<b>General data</b>	XC700 / XC800 / XC900			XF700 / XF800 / XF900   CS100   ID100 / ID510
Resolution	640 × 480 px	1280 × 960 px	1600 × 1200 px	752 × 480 px
Sensor	1/4" CCD (monochrome, color)	1/3" CCD (monochrome, color)	1/1.8" CCD (monochrome)	1/3" CMOS (monochrome, color)
LED illumination	Fully integrated VeriFlash® flash controller for external illumination			White (LED class: Risk group 1 low risk, EN 62471:2008) Infrared (860 nm) (LED class: free group risk-free, EN 62471:2008)
Lens	Interchangeable lens (C-mount)			f = 10 mm   f = 8 / 12 mm   f = 16 mm
Min. object distance	Depending on interchangeable lens			50 mm   50 mm   70 mm   100 mm <sup>1)</sup>
Max. object distance	Depending on interchangeable lens			∞   450 mm   300 mm
<b>Speed</b>	Max. inspections / s			Max. inspections / s
High-resolution mode	118 (monochrome)   116 (color)	32 (monochrome)   31 (color)	21 (monochrome)	50 (monochrome)   50 (color)
High-speed mode* (* limited resolution)	144 (monochrome)	54 (monochrome)	35 (monochrome)	100 (monochrome, XF series only)
Defect image memory	32	8	4	32
Number of jobs	Up to 255 on the device (can be exchanged via process interface)			
Features per job	32			
<b>Electrical data</b>	XC700 / XC800 / XC900			XF700 / XF800 / XF900   CS100   ID100 / ID510
Power supply	=== 24 V ± 25 % / Class 2 per NEC / Protection class III   18 ... 30 V <sup>2)</sup>			
Power consumption	Max. 42 W (with IO and illumination)			Max. 18 W (with IO)   Typical 5 W (I <sub>max</sub> = 1 A at 24 V) <sup>2)</sup>
Inputs	8 ... 30 V			
Outputs	PNP I <sub>peak</sub> = 100 mA and I <sub>eff</sub> = 50 mA			
Digital input	Trigger, Job selection, External teach-in, Encoders (CH-A, CH-B) 500 kHz			<sup>1)</sup> XF / XC 700 / 800 / 900, ID510 only
Digital output	Pass / Fail 1-5 <sup>3)</sup> , Flash Sync, Alarm, Camera Ready, Output Enable			<sup>2)</sup> CS100 / ID100 only
<b>Communication</b>	Ethernet (10BASE-T / 100BASE-TX) PROFINET (CC-A) <sup>1)</sup> / Ethernet/IP <sup>TM 1)</sup> , TCP / UDP (Ethernet) <sup>4)</sup> , RS485 <sup>5)</sup>			<sup>3)</sup> VSxxxxxxxxxRP: 1-3
Initial setup				<sup>4)</sup> except CS100
Process interface				<sup>5)</sup> VSxxxxxxxxxRP only
<b>Integr. flash controller</b>	XC700 / XC800 / XC900			XF700 / XF800 / XF900   CS100   ID100 / ID510
Voltage (permanent)	=== 12 V DC or === 24 V DC			—
Voltage (pulsed)	┌ 24 V DC or ┌ 48 V DC			—
Current (permanent)	I <sub>max</sub> = 800 mA at === 24 V DC (+/- 10 %, at least +/- 100 mA, at 25 °C)			—
Current (pulsed)	I <sub>max</sub> = 4 A at ┌ 48 V DC (+10 / -20 %, at least +/- 100 mA, at 25 °C)			—
Flash time	Max. 1 ms (Duty Cycle max. 1:10)			—
<b>Operating conditions</b>	XC700 / XC800 / XC900			XF700 / XF800 / XF900   CS100   ID100 / ID510
Operating temperature	+5 ... +55 °C @ measurement point			+5 ... +60 °C   +5 ... +50 °C <sup>2)</sup> @ measur. point
Storage temperature	-20 ... +70 °C			
Humidity	0 ... 90 % (non-condensing)			
Protection class	IP 67 (XC series: with tube)			IP 67
Vibration load	IEC 60068-2-6, IEC 60068-2-64			
Mech. shock resistance	EN 60068-2-27			
<b>Mechanical data</b>	XC700 / XC800 / XC900			XF700 / XF800 / XF900   CS100   ID100 / ID510
Width × Height × Depth	53 mm × 99.5 mm × 49.8 mm (without lens / tube)			53 mm × 99.5 mm × 38 mm
Material	Housing: aluminum Cover glass tube: PMMA			Housing: aluminum Cover glass: PMMA <sup>6)</sup>
Weight (approx.)	300 g (without lens / tube)			250 g
<b>Code types / OCR</b>	XC800 / XC900			XF800 / XF900   ID510   ID100
Barcode <sup>7)</sup>	2/5 Industrial, 2/5 Interleaved, Codabar, Code 39, Code 93, Code 128, PharmaCode EAN 8, EAN 13, UPC-A, UPC-E: Base code + variants Add-On 2, Add-On 5 GS1 DataBar (RSS): Limited, Expanded, Expanded Stacked GS1 DataBar (RSS-14): Omnidir, Truncated, Stacked, Stacked Omnidir GS1 128			
Matrix code <sup>7)</sup>	DataMatrix (ECC 200), GS1-DataMatrix, QR, PDF417			
Font <sup>8)</sup>	Many font styles (recommended: sans serif, proportional), Dot Matrix, Characters: A-Z a-z 0-9 + - . : / ( )			

<sup>6)</sup> for XF700 / XF800 / XF900, CS100, ID510 with infrared illumination: daylight filter 780 nm integrated


<sup>7)</sup> incl. quality rating of all barcodes according to ISO / IEC 15416 as well as all matrix codes according to ISO / IEC 15415 or AIM DPM-1-2006

<sup>8)</sup> XC800 / XC900, XF800 / XF900, ID510 only



### Dimension drawing (XC series)

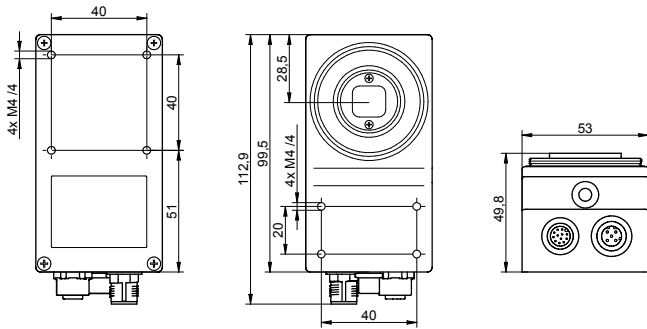

XC Tube




XC Tube Module



C-mount support


Dimensions in mm

### Electrical connection <sup>1)</sup> M12 / 12-pin, A-coded




1: Power (+18-30 V DC)	7: OUT3
2: Ground	8: IN3
3: IN1 (Trigger)	9: OUT4   RS485+ <sup>2)</sup>
4: OUT1	10: IN4
5: IN2	11: IN5
6: OUT2	12: OUT5   RS485- <sup>2)</sup>

### Electrical connection illumination <sup>1,3)</sup> M8 / 4-pin <sup>4)</sup>



1: +24 V or +48 V Flash
2: +12 V or +24 V Flash
3: Ground
4: Flash Sync <sup>5)</sup> PNP 100 mA

### Ethernet connection <sup>1)</sup> M12 / 4-pin



1: TD+
2: RD+
3: TD-
4: RD-

<sup>1)</sup> on device


<sup>2)</sup> RS485: VSxxxxxxxxRP only

<sup>3)</sup> XC series only



<sup>4)</sup> voltage outputs configurable by software

<sup>5)</sup> voltage according to power supply

### Dimension drawing (XF/CS/ID series)

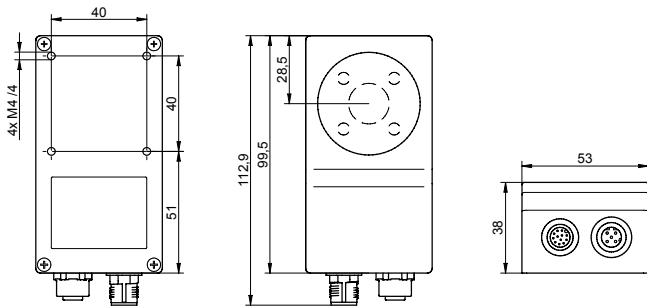

\* working distances > 400 mm possible

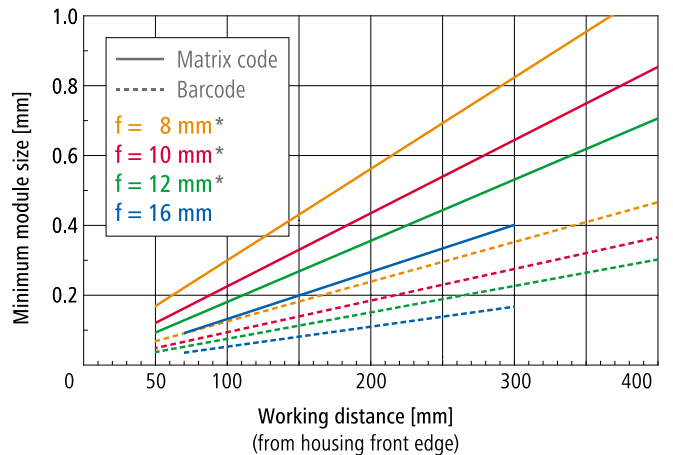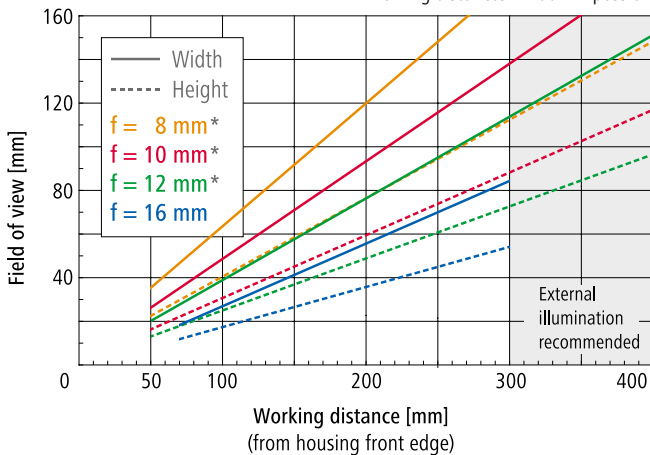

Device dependent:




# System design


## Lab setup accessories (optional)

11048083	Connecting cables <i>VeriSens</i> <sup>®</sup> , adapter M12 / DC socket
11079750	Power supply 24 V / 1 A, international, DC plug
11051407	Laboratory stand, hinged bracket, mounting material







## Mounting accessories (optional)

11177010	 <i>VeriSens</i> <sup>®</sup> mounting adapter
----------	---


## Polarization filter (optional)

11161075	ZVF-Filter Pol. <i>VeriSens</i> <sup>®</sup> ID / CS / XF (VSxxxxxxxWxxxx only)	
----------	--	---

## Connecting cables<sup>4)</sup> shielded, to free cable end

11201118	2 m	
11195097	5 m	
11195098	10 m	
11201128	2 m	
11195094	5 m	
11195095	10 m	

<sup>4)</sup> suitable for robotics, UL approved

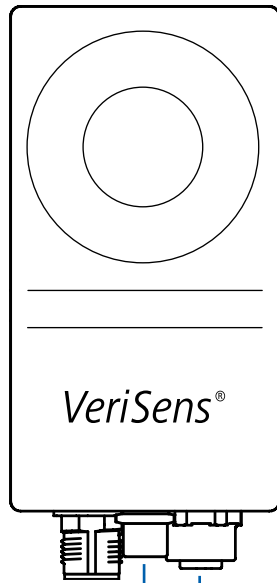

## Lens accessories (optional)

11088325	XC Tube, M47, length 44 mm (scope of delivery <i>VeriSens</i> <sup>®</sup> XC)
11115649	XC Tube Module, M47, 6 mm
11089149	XC Tube Module, M47, 12 mm
11010529	Close-up ring set 6-part, 0.5 / 1 / 5 / 10 / 20 / 40 mm
11092000	Pentax <sup>®</sup> polarization filter, linear: filter thread 27 mm <sup>1)</sup>
11175428	filter thread 30.5 mm <sup>2)</sup>
11167713	filter thread 40.5 mm <sup>3)</sup>
11006551	Pentax <sup>®</sup> color filter <sup>1)</sup> (red), filter thread 27 mm
11097573	IR cut filter, C-mount, height 2.5 mm, screw-in tool
11097576	Daylight filter, C-mount, height 2.5 mm, screw-in tool


Compatible to lenses:

- <sup>1)</sup> Article No. 11150226 / 11150228 / 11003417
- <sup>2)</sup> Article No. 11008992 / 11150229 / 11150230 / 11003041  
11175031 / 11175034 / 11175035 / 11175036
- <sup>3)</sup> Article No. 11150223 / 11002877




## Ethernet cables shielded, to RJ-45 plug

2 m	11700903
5 m	11700905
10 m	11700904
2 m	11701260
5 m	11701261
10 m	11701262

## Monitor (All-in-one PC, optional)







11122988	ZVP-ALL_IN_ONE_PC.DE (10.4", 1024 × 768 px, Stylus)	
11093293	ZVP-ALL_IN_ONE_PC.EN (10.4", 1024 × 768 px, Stylus)	

## Illumination cables

11088882	1.5 m	Extension cable shielded, male conn. straight M8, to female conn. straight M8 <sup>5)</sup>	
11136134	0.3 m	Extension cable shielded, male conn. straight M8, to female conn. straight M8 <sup>5)</sup>	
10163693	2 m	Adapter cable, free cable end, to female connector straight M8 <sup>5)</sup>	
11175008	0.15 m	Adapter cable, ZVI-LUMIMAX <sup>®</sup> T1 at <i>VeriSens</i> <sup>®</sup> XF / XC / CS / ID series	

<sup>5)</sup> *VeriSens*<sup>®</sup> XC series only

## Set of mounting brackets

11092203	VB Fix Kit FLDR-i90B, small (57 mm)	for LED ring light FLDR-i90B to <i>VeriSens</i> <sup>®</sup> XC series	
11092204	VB Fix Kit FLDR-i90B, large (93 mm)		
11136136	VB Fix Kit RONDO-LX, small (57 mm)	for LED ring light ZVI-RONDOLX to <i>VeriSens</i> <sup>®</sup> XC series	
11136139	VB Fix Kit RONDO-LX, large (93 mm)		
11076264	ZVI-VB Fix Kit Industrial Light	for illumination (e.g. Spot 5W)	
11175009	ZVI-VB Fix Kit Adapter Spot5W	to <i>VeriSens</i> <sup>®</sup> XF / XC / CS / ID	

### Interchangeable lenses (C-mount, VeriSens® XC series only)



Article No.	Type name	Focal distance [mm]	Aperture speed range	Minimum distance [m]	Maximum lens length <sup>1)</sup> [mm]	Filter thread [mm]	XC Tube Module <sup>2)</sup> (Art. Nr. 11089149)
11037579	ZVL-FL-HC0416X-VG <sup>3)</sup>	4.2	F1.6 - C	0.20	44	–	1 piece
11008992	ZVL-FL-HC0614-2M	6	F1.4 - 16.2	0.10	38	30.5	1 piece
11150223	ZVL-FL-CC0814A-2M	8	F1.4 - 16.2	0.10	37	40.5	1 piece
11002877	ZVL-FL-CC0815B-VG <sup>3)</sup>	8.5	F1.5 - C	0.20	40	40.5	1 piece
11150226	ZVL-FL-CC1214A-2M	12	F1.4 - 16.2	0.10	46	27.0	1 piece
11150228	ZVL-FL-CC1614A-2M	16	F1.4 - 16.2	0.10	33	27.0	–
11150229	ZVL-FL-CC2514A-2M	25	F1.4 - 16.2	0.10	38	30.5	1 piece
11003417	ZVL-FL-CC3516-2M	35	F1.6 - 16	0.40	36	27.0	–
11150230	ZVL-FL-CC5024A-2M	50	F2.8 - 22.2	0.30	47	30.5	1 piece
11003041	ZVL-FL-CC7528-2M	75	F2.8 - 32	0.70	60	30.5	3 pcs

<sup>1)</sup> measured from C-mount support (see XC series scale drawing)

<sup>2)</sup> necessary with lens length > 36 mm

<sup>3)</sup> only compatible to VeriSens® with 0.3 MP resolution (VS XCxxxx03xxxxx)

### External illumination modules <sup>4)</sup>

Article No.	Type name	Product description	Cable [cm]	Illuminated area [mm]	Outer dimensions [mm]	Height [mm]
<b>Cable with M8/4-pin connector <sup>4,5)</sup></b>						
11085869	FLDR-i90B-W	LED ring light, white	30	∅ 87	∅ 93,5	24.6
11154321	FLDR-i90B-SR24	LED ring light, red 626 nm	30	∅ 87	∅ 93,5	24.6
11090900	FLDR-i90B-IR24	LED ring light, IR 875 nm	30	∅ 87	∅ 93,5	24.6
11086539	FLDL-i150x15-W	LED bar light, white, diffuse	100	148 × 15	158 × 17.5	20
11086540	FFPR-i100-W	LED dark field light, white, diffuse	30	∅ 94,6	∅ 100	40
11086541	FLDM-i100-W	LED dome light, white	30	∅ 80	∅ 130	61
11086536	FLDL-TP-Si36-W	LED back light, white, diffuse	100	36 × 36	47 × 47	15
11086538	FLDL-TP-Si85x77-W	LED back light, white, diffuse	100	85 × 77	95 × 95	15
11086537	FLDL-TP-Si200x100-W	LED back light, white, diffuse	100	200 × 100	228 × 116	23.5
11095910	FLFL-Si60-IR24	LED back light, IR 850 nm, diffuse	100	60 × 60	94 × 94	10
<b>With M8/4-pin connector <sup>4,7)</sup></b>						
11130179	ZVI-RONDOLX_24VDC_weiss_120°	LED ring light, white, 120°	–	∅ 67	∅ 101	24
11130176	ZVI-RONDOLX_24VDC_IR850nm_50°	LED ring light, IR 850 nm, 50°	–	∅ 67	∅ 101	24
11130150	ZVI-RONDOLX_24VDC_IR850nm_120°	LED ring light, IR 850 nm, 120°	–	∅ 67	∅ 101	24
11130185	ZVI-TOPLINED1_24VDC_weiss_120°	LED bar light, white, 120°	–	78 × 25	78 × 25	23
11130186	ZVI-TOPLINED1_24VDC_SHweiss_120°	LED bar light, SH white, 120°	–	78 × 25	78 × 25	23
11130187	ZVI-TOPLINED1_24VDC_rot617nm_30°	LED bar light, red 617 nm, 30°	–	78 × 25	78 × 25	23
11135012	ZVI-TOPLIGHT80_24VDC_rot617nm_30°	LED incident light, red 617 nm, 30°	–	87 × 87	87 × 87	20
11130183	ZVI-ARCUSM_24VDC_weiss_120°	LED dark field light, white, diffuse	–	∅ 68	∅ 120	9.5
11130181	ZVI-HILIGHT80_24VDC_weiss	LED back light, white, diffuse	–	78 × 78	87 × 87	20
11130182	ZVI-HILIGHT120_24VDC_weiss	LED back light, white, diffuse	–	118 × 118	127 × 127	20

<sup>4)</sup> VeriSens® XC series only

<sup>5)</sup> connector directly on the device

<sup>6)</sup> supplier: Falcon Illumination MV GmbH & Co. KG






















<sup>7)</sup> supplier: Büchner Lichtsysteme GmbH

### Illumination accessories (optional)

11167410	Polarization filter for FLDR-i90B	11167411	Support polarization filter for für FLDR-i90B	11167413	Diffusor A1421 for FLDR-i90B-DP
----------	-----------------------------------	----------	---	----------	---------------------------------










# VeriSens® feature checks: overview.

VeriSens® vision sensors provide 23 different feature checks. The device-specific feature set is fully included with the purchase. Up to 32 checks can be performed all at once – with a single image acquisition – for comprehensive and efficient quality control.
















			Models					
			XF700 / XC700 <sup>1)</sup>	XF800 / XC800 <sup>1)</sup>	XF900 / XC900	CS100	ID510	ID100
<b>Part location</b>								
	<p><b>Part location on contours (FEXLoc®)</b></p> <p>Determines the location and rotational position of a part based on its contours. All subsequent feature checks are aligned according to the determined position.</p>			360°	360°	360°	360°	
	<p><b>Part location on edges (FEXLoc®)</b></p> <p>Determines the location and rotational position of a part from a single edge or two edges at right angles to each other. All subsequent feature checks are aligned according to the determined position.</p>			■	■	■		
	<p><b>Part location on circle (FEXLoc®)</b></p> <p>Determines the location and rotational position of circular parts. All subsequent feature checks are aligned according to the determined position.</p>			■	■	■		
	<p><b>Part location on text line</b></p> <p>Determines the location and rotational position of text within a working area. The text may change during this task. All subsequent feature checks are aligned according to the determined position.</p>			■	■	■	■	
<b>Geometry</b>								
	<p><b>Distance</b></p> <p>Determines the distance between two edges.</p>			■	■	■	■	
	<p><b>Circle</b></p> <p>Determines the diameter, location and roundness in comparison to a reference circle.</p>			■	■	■	■	
	<p><b>Angle</b></p> <p>Determines the angle between two edges.</p>			■	■	■		

Models
XF700 / XC700 <sup>®</sup>
XF800 / XC800 <sup>®</sup>
XF900 / XC900
CS100
ID510
ID100

Geometry

	<p><b>Count edges</b> Determines the number of edges along a tracing ray.</p>			■	■	■		
	<p><b>Point position</b> Determines the coordinates of one point.</p>			■	■	■		
	<p><b>Edge characteristics</b> Compares the distances of edges along a tracing ray.</p>			■	■	■		

Feature comparison

	<p><b>Count contour points</b> Determines the number of contour points within a working area.</p>			■	■	■	■	
	<p><b>Contour comparison</b> Compares the contour of a taught-in part with the contour of the current part.</p>			■	■	■	■	■
	<p><b>Color identification</b> Identifies color within the operating range and its deviation from the reference color.</p>			■	■			
	<p><b>Brightness</b> Determines the average brightness in a working area.</p>			■	■	■	■	
	<p><b>Contrast</b> Calculates the contrast in a working area.</p>			■	■	■		

Models

XF700 / XC700<sup>1)</sup>

XF800 / XC800<sup>1)</sup>
















XF900 / XC900

CS100




ID510

ID100

Feature comparison

 <p><b>Area size</b> Identifies light or dark respectively color-defined areas in the image. Determines the total area or the largest continuous area.</p>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
 <p><b>Count areas</b> Counts the visible continuous light or dark respectively color-defined areas in the image.</p>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
 <p><b>Pattern comparison</b> Compares the working area with a taught-in pattern.</p>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
 <p><b>Find object positions</b> Finds several objects based on a taught one.</p>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
 <p><b>Color positioning</b> Verifies presence of defined colors within defined image sections.</p>			<input type="checkbox"/>	<input type="checkbox"/>					

Identification

 <p><b>Barcode</b> Reads barcodes. Determines quality according to ISO/IEC 15416, result is output via process interface, can be compared to a set value.</p>			<input type="checkbox"/>	<input type="checkbox"/>					
 <p><b>Matrix code</b> Reads matrix codes (ECC200, GS1, QR, PDF417) at any angle of rotation. Determines quality according to ISO/IEC 15415 or AIM DPM-1-2006, result is output via process interface, can be compared to a set value.</p>			<input type="checkbox"/>	<input type="checkbox"/>					
 <p><b>Text</b> Reads numbers and characters. Characters read are output via process interface, can be compared to a set value.</p>			<input type="checkbox"/>	<input type="checkbox"/>					

<sup>1)</sup> Feature checks available: "M" corresponds to "monochrome sensors only"



# Additional features to solve your application.

## Image acquisition

Optics XF / CS / ID series:	8 mm   10 mm   12 mm   16 mm
Optics XC series:	C-mount
Illumination XF / CS / ID series:	White   Infrared
Illumination XC series:	VeriFlash® (integrated flash controller) <small>(infrared: integrated daylight filter 780 nm)</small>
Configurable web interface:	HTTP   HTTPS <small>(live image, job switching, retrieving defect images, MultiViewer (700/800/900))</small>
Save images via:	FTP   SFTP
Configuration via Ethernet	

## Functions

Process linkage:	Digital I/Os
Process interface for:	Data output   Universal Robots (URCap)
	Universal Robots+ Certified (UR+)
	Ethernet (TCP/IP, UDP)   Industrial Ethernet (PROFINET, EtherNet/IP™)   RS485
	Baumer FEX® image processor
	ColorFEX® intelligent 3D color assistant (device dependent)
	User administration / Password protection
	Coordinate conversion   Automated coordinate alignment via SmartGrid
	Distortion correction (monochrome only)   Z calibration

## Process integration

Flexible result conjunction
Result conjunction with integrated digital inputs
Test functionality
High-speed mode (monochrome only)
Gamma correction (monochrome only)

<sup>1)</sup> non-configurable, Industrial Ethernet not supported

### ■ Wide range of interfaces

Up to 5 digital inputs and outputs, process interface (device dependent) for result output and/or device control or encoder interface for path-based triggering and ejection – VeriSens® is prepared for almost any integration method. Prefabricated function blocks are available for the Siemens SIMATIC® S7.

### ■ Integrated FTP / SFTP client

To store live and defect images for tracking or later analysis and / or visualization as easily as possible, all VeriSens® vision sensors support FTP servers.

### ■ Remote access

The Ethernet interface integrated in all models allows remote access (including gateway and NAT support) via the VeriSens® Application Suite to enable worldwide product access.

Models	XF700 / XF800	XC700 / XC800	XF900	XC900	CS100	ID510	ID100
--------	---------------	---------------	-------	-------	-------	-------	-------

■   -   ■   ■	-   -   -   -	■   -   ■   -	-   -   -   -	-   ■   -   ■	-   -   ■   -	-   ■   -   ■
-	■	-	■	-	-	-
■   ■	-   -	■   ■	-   -	■   ■	■   ■	■   -
-	■	-	■	-	-	-
■   ■	■   ■	■   ■	■   ■	■   -	■   ■	■   -
■	■	■	■	■	■	■

5 / 5	5 / 5	5 / 5	5 / 5	5 / 5	5 / 5	5 / 3
■   -	■   -	-   ■	-   ■	-   -	■   -	■ <sup>1)</sup>   -
		■	■			
■   ■   -	■   ■   -	■   ■   -	■   ■   -	-   -   -	■   ■   -	■   -   ■
■	■	■	■	■	■	
■	■					
■	■	■	■		■	■
■   -	■   -	■   ■	■   ■			
■   -	■   -	■   ■	■   ■	-   -	-   -	-   -

■	■	■	■			
■	■	■	■			
■	■	■	■	■	■	■
■	■	■	■			
■	■	■	■			

### ■ Integrated test functionality

VeriSens® vision sensors offer an integrated test function which enables you to have images collected during a test run sorted according to good and reject parts in order to evaluate the reliability of the inspection task you created. The test function includes further useful features – ranging from statistical data processing including histogram representation to data export (CSV format).

### ■ User management

VeriSens® vision sensors feature an integrated user management with password protection, for example, to prevent modification of device settings by machine operators.

### ■ Backup & Restore function

All VeriSens® vision sensors support service and commissioning through a backup & restore function for the device software settings and inspection tasks stored in the device, to enable easy backup or transmission of this data to other devices.

# Worldwide presence.



## Africa

Algeria  
Cameroon  
Côte d'Ivoire  
Egypt  
Morocco  
Reunion  
South Africa

## America

Brazil  
Canada  
Colombia  
Mexico  
United States  
Venezuela

## Asia

Bahrain  
China  
India  
Indonesia  
Israel  
Japan  
Kuwait  
Malaysia  
Oman  
Philippines  
Qatar  
Saudi Arabia  
Singapore  
South Korea  
Taiwan  
Thailand  
UAE

## Europe

Austria  
Belgium  
Bulgaria  
Croatia  
Czech Republic  
Denmark  
Finland  
France  
Germany  
Greece  
Hungary  
Italy  
Malta  
Martinique  
Netherlands  
Norway  
Poland  
Portugal  
Romania  
Russia  
Serbia  
Slovakia  
Slovenia  
Spain  
Sweden  
Switzerland  
Turkey  
United Kingdom

## Oceania

Australia  
New Zealand



For more information  
about our worldwide  
locations go to:  
[www.baumer.com/worldwide](http://www.baumer.com/worldwide)

Represented by: